

HRL 1234W 12 34 /

HRL1234W -


20%



260	(6-9)	20°		8 Eurobat)
12 (6)				100%
34 /	15-		U . - 1.67 /	25°
2.7				
130A (5)				
17.0				
	-15°	+50°		
	-15°	+40°		
	-15°	+40°		
367				
25°				
13.5 - 13.8	25°			
3.4 A (),	
			I _{max}	
14.4 - 15.0	25°			
	25°	6-	*	
F2-Faston Tab 250				
ABS (



150.9±2.0	64.8±1.0	94.3±1.0	98.6±1.0
-----------	----------	----------	----------

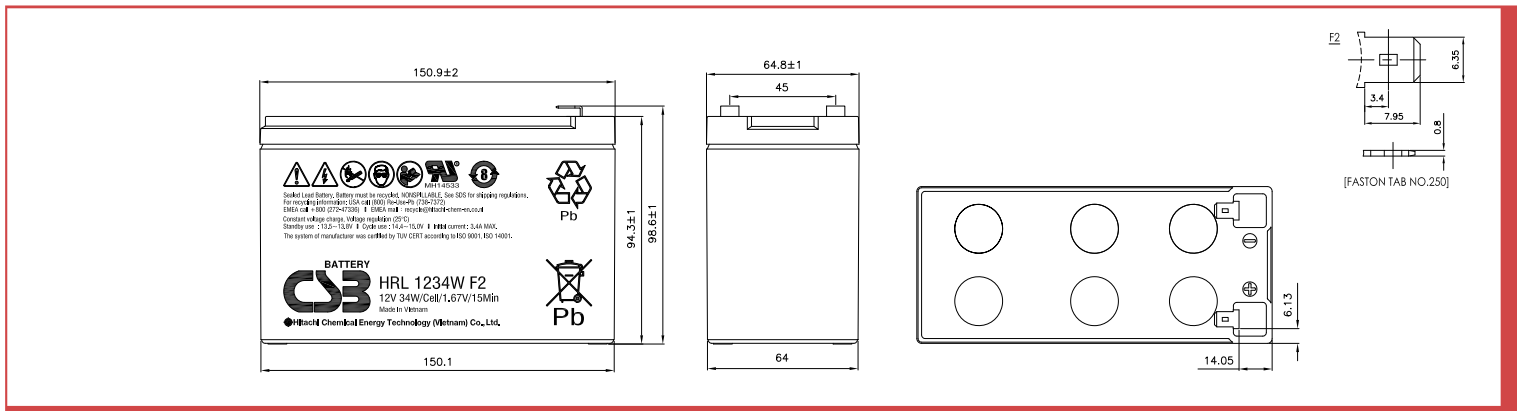

: A (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	77.1	50.2	43.1	37.9	30.7	25.9	18.8	14.8	10.7	7.59	5.97	4.26
1.67	69.6	48.0	41.7	36.9	30.2	25.6	18.6	14.7	10.6	7.56	5.95	4.25
1.70	66.0	46.6	40.8	36.2	29.7	25.4	18.5	14.6	10.5	7.55	5.94	4.24
1.75	60.0	43.6	38.5	34.6	28.7	24.6	18.2	14.4	10.4	7.48	5.90	4.22
1.80	53.2	39.8	35.5	32.3	27.0	23.4	17.5	14.0	10.2	7.32	5.79	4.16
1.85	45.8	35.3	31.9	29.0	24.8	21.4	16.4	13.2	9.69	6.99	5.55	4.00

: / (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	754	530	464	412	339	290	215	171	125	89.4	70.9	51.1
1.67	699	514	452	404	334	287	213	170	124	89.2	70.7	51.0
1.70	689	503	443	398	330	284	212	169	123	89.0	70.6	50.9
1.75	639	477	424	383	321	278	209	167	122	88.3	70.2	50.7
1.80	582	441	397	359	306	266	203	163	120	86.8	69.1	50.1
1.85	515	400	359	329	283	247	191	155	115	83.4	66.6	48.5